




MODEL №: 0864

ISSUED: JAN 1987

REVISED: 15 APR 2022

SURFACE MOUNTED DUAL SANITARY NAPKIN AND TAMPON VENDOR (Pg 1 of 2)

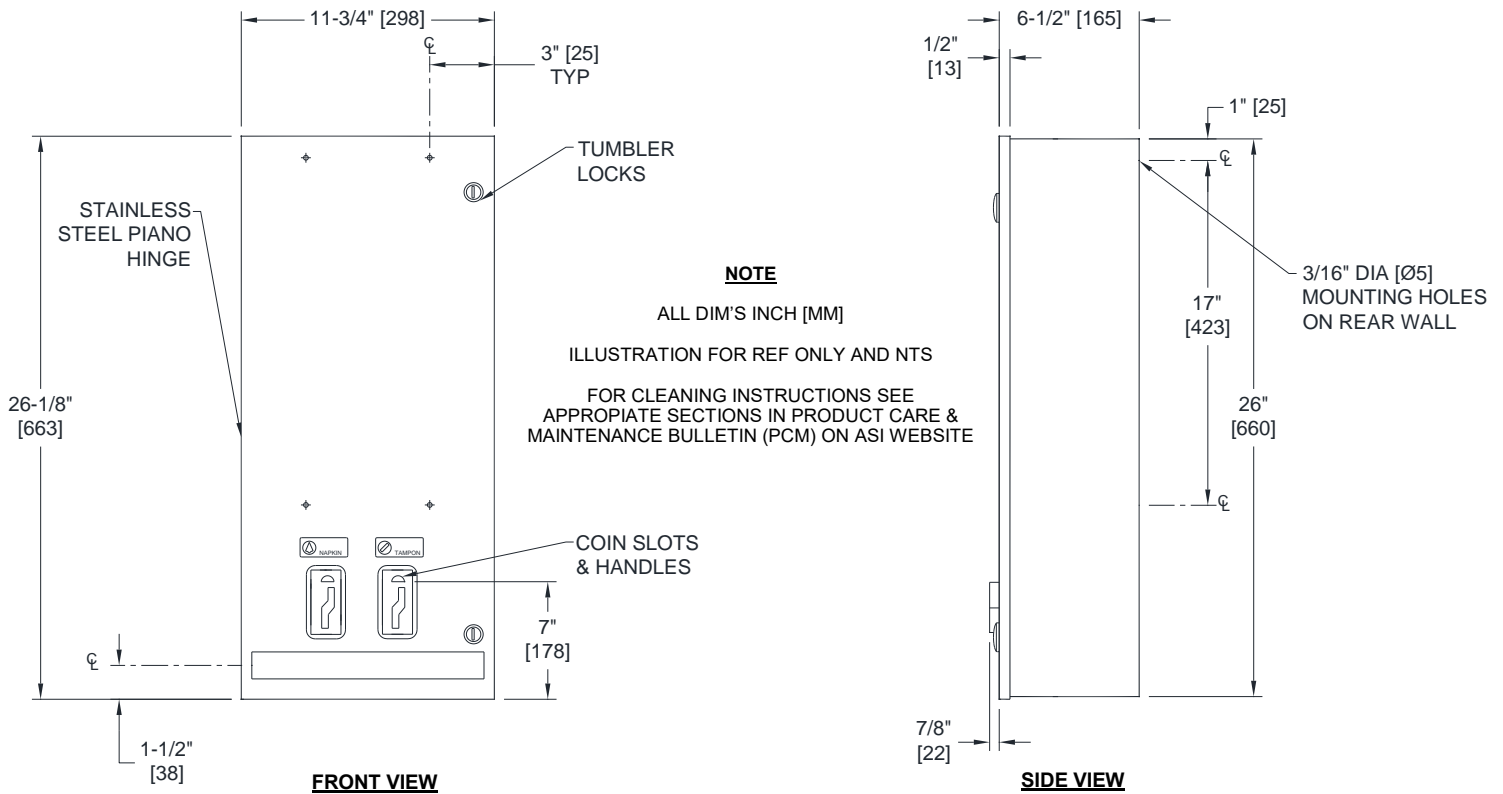

SPECIFICATION

Surface Mounted Dual Sanitary Napkin & Tampon Dispenser shall hold 30 napkins and 27 tampons of specified sizes. Door shall be 18 gage type 304 stainless steel alloy 18-8. All exposed surfaces shall be satin finish (or Powder Coated (PC) Matte Black finish if suffix -41 is added to Model №) and be protected during shipment with PVC film easily removable after installation. Cabinet shall be 22 gage same grade stainless steel. Door shall be attached with a full length 3/16" Dia [Ø4,8] stainless steel multi-staked piano hinge and shall be held closed with two (2) tumbler locks keyed alike to other ASI washroom equipment. Internal coin-box shall be keyed differently than door locks. Dispensing mechanisms shall be fastener mounted internally to provide ability to change mechanisms for coinage denomination. Structural assembly of body and door components shall be of welded construction and have no exposed fasteners or welded seams. Weights for each feed track shall be supplied. Unit shall be compliant with 2010 ADA Accessibility Standards when installed in compliance with appropriate reach range and maintained according to manufacturer's instructions (on this TDS and all product labeling), that operation may be accomplished with one hand, requires less than 5lb_f (22.2 N) and does not require tight grasping, pinching, or any twisting of the wrist. Factory installed coin operation denomination shall be _____. (Please fill in 25¢ or 50¢; or FREE and add denomination as suffix to model № (e.g. 0864-25)).

Surface Mounted Dual Sanitary Napkin and Tampon Dispenser shall be Model № 0864-_____ (please fill in denomination suffix: 25, 50, or F) (add -41 for PC Matte Black) of American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Mount unit on wall using four (4) № 10 self-tapping screws (by others) through concealed holes provided in cabinet rear wall. For maximum usability install unit so that coin slot is between 48" (1219) Max. AFF (Above Finished Floor) and 38" [965] Min. AFF. Note that coin slot is 7" (178) above bottom of cabinet. Installer must provide adequate wall anchoring for screw mounting.



MODEL №: 0864

ISSUED: JAN 1987

REVISED: 15 APR 2022

SURFACE MOUNTED DUAL SANITARY NAPKIN AND TAMPON VENDOR (Pg 2 of 2)

OPERATION

Deposit of specified coin allows operation of dispenser. Napkin and tampon dispensers operate independently. Selected product drops into vending opening after operator actuation. Indicator displays empty condition and blocks coin slot when vend product is depleted. Unit vend product supply is replenished on cycle determined by maintenance needs by opening door and manually reloading product into dispenser supply tracks. Empty indicator automatically resets upon refill. Track weights **MUST BE USED** to provide positive feed. Coins are retrieved from cash drawer opened using different key than is used to open door for service.

**NAPKINS, SINGLES, CARDBOARD-BOXED, SEMIGLOSS FINISH; CAPACITY: 30
BOX SIZE: 4-1/4" x 3" x 1-1/8" (108 x 76 x 29)**

Stayfree	№ 4
Gards	№'s 247, or 147
Kotex	№'s 704, 707, 07010, 07040, 07045, 07300, 07320
Pure-Nat	№ M-4
Modess	№ 4

**TAMPONS, CYLINDER, CARDBOARD, SEMIGLOSS, CRIMPED ENDS; CAPACITY: 27
TUBE SIZE: 3/4" diameter x 5-1/4" (Ø19 x 134)**

Tampax	
Modess Tampons	