



HLQB Linear range of quartz infrared indoor heaters

HLQB range of quartz infrared heaters provide instant high energy heat for a wide variety of indoor situations. With models ranging from 1.5kW to 18kW, in a variety of sizes and designs, they provide the perfect solution to zone or localised heating requirements.

HLQB Range



These heaters can be wall mounted or suspended from ceilings and are available for single and three phase circuits. Manufactured from aluminium and finished with a neutral black powder coat, they provide a smart and professional appearance whilst offering durability and longevity.

Available with high efficiency gold, rose gold or platinum short wave infrared lamps. The ultra low glare platinum lamp option is perfect for those areas where very little light output is required.

Full range of infrared heaters for mobile and fixed systems

- Ideally suited for religious, sporting, commercial and industrial applications.
- Guards available as an additional accessory if required.
- Low energy consumption with substantially reduced emissions compared to gas heaters.
- Silent instant heat with reduced glare.
- Lamps guaranteed for a minimum of 5000 hours.
- Design and planning service available.

HLQB-L2 Range




Applications

- Churches
- School halls
- Sports halls
- Offices
- Shops
- Garages/workshops
- Factories
- Warehouses
- Despatch areas



HLQB-L3 Range

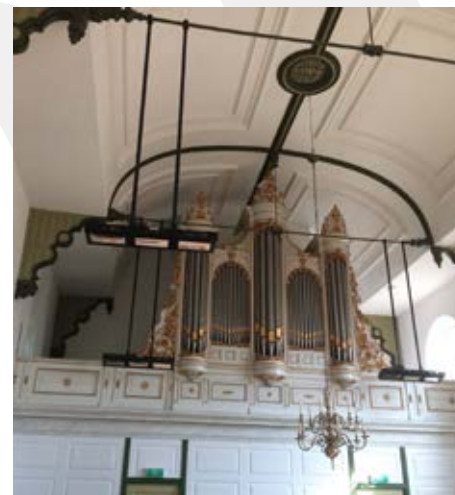



Technical Data

HLQB Linear Infrared Heater Range

HLQB Range

Code	No. of Lamps	Watts	Supply Phase 220/240/ 380-415 Volts	Weight (kg)
1 HLQB1-15	1	1500	Single Phase	3.5
HLQB1-20	1	2000		
2 HLQB1L2-30	2	3000	Single Phase	7.0
HLQB1L2-40	2	4000		
3 HLQB1L3-45	3	4500	Single Phase 3-Phase	10.5
HLQB1L3-60	3	6000		
4 HLQB2-30	2	3000	Single Phase	7.0
HLQB2-40	2	4000		
5 HLQB2L2-60	4	6000	3-Phase only	14
HLQB2L2-80	4	8000		
6 HLQB2L3-90	6	9000	3-Phase only	21
HLQB2L3-120	6	12000		
7 HLQB3-45	3	4500	3-Phase only	10.5
HLQB3-60	3	6000		
8 HLQB3L2-90	6	9000	3-Phase only	21
HLQB3L2-120	6	12000		
9 HLQB3L3-135	9	13500	3-Phase only	32
HLQB3L3-180	9	18000		


Note: 1 & 4 are pre-wired with 1.5m lead. All other models are to be wired into the terminal box provided by the installer.

Supplied with:
Wall bracket


Optional extras:
front guard
Overhead mountin kit

Area coverage

	H (m)	X (m)	Y (m)	Z (m)	Area (m ²)
wall mounted					
1	2.5	3.2	2.6	6.0	12.0
2	2.5	6.4	2.8	11.5	25.0
3	3.5	10.5	3.0	18.0	42.7
4	2.5	3.2	3.0	6.8	15.0
5	4.0	6.8	3.0	13.5	30.4
6	4.0	11.5	3.2	18.0	47.2
7	3.5	4.0	4.0	8.0	24.0
8	4.0	7.0	3.6	14.5	38.7
9	4.5	12.0	4.2	20.0	67.2
overhead mounted					
1	3.0	3.0	2.0	-	6.0
2	3.0	6.0	2.0	-	12.0
3	4.0	9.0	2.2	-	19.8
4	3.0	3.0	2.3	-	6.9
5	4.5	6.0	3.8	-	22.8
6	4.5	9.0	4.2	-	37.8
7	4.0	5.0	3.4	-	17.0
8	4.5	10.0	4.1	-	41.0
9	5.0	15.5	4.4	-	68.2



Overhead mount




H = mounting height

Note: Heating coverage areas shown are focussed measured data. Temperatures around the area fringes may be felt less. Therefore, depending on the intended use, this must be considered and allowances made accordingly to account for individual senses. The data given is therefore for guidance purposes only.

Dimensions

Depth of all models: 110mm

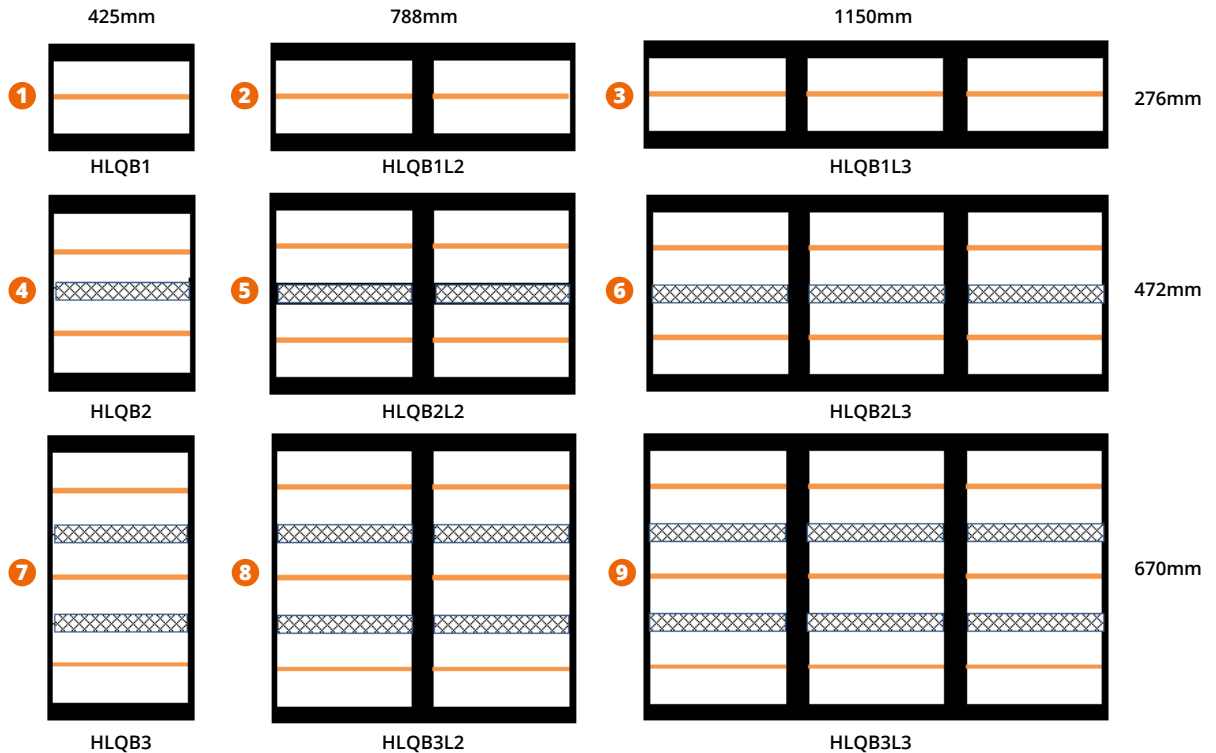

VICTORY

T +44(0)1727 815137
E: sales@victorylighting.co.uk
www.victorylighting.co.uk

Distributed by:

© Victory Lighting (UK) Ltd 2019. The information contained in this literature is for general information purposes only. Victory Lighting (UK) Ltd endeavours to keep the information up to date and correct, but makes no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information, products, services, or related graphics contained in this literature. Victory Lighting (UK) Ltd accepts no liability for any loss or damage including without limitation, indirect or consequential loss or damage, or any loss or damage whatsoever arising from loss of data or profits arising out of, or in connection with, the use of this literature.