




MODEL №: 6467

ISSUED: JAN 1987

REVISED: 22 APR 2022

RECESSED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE

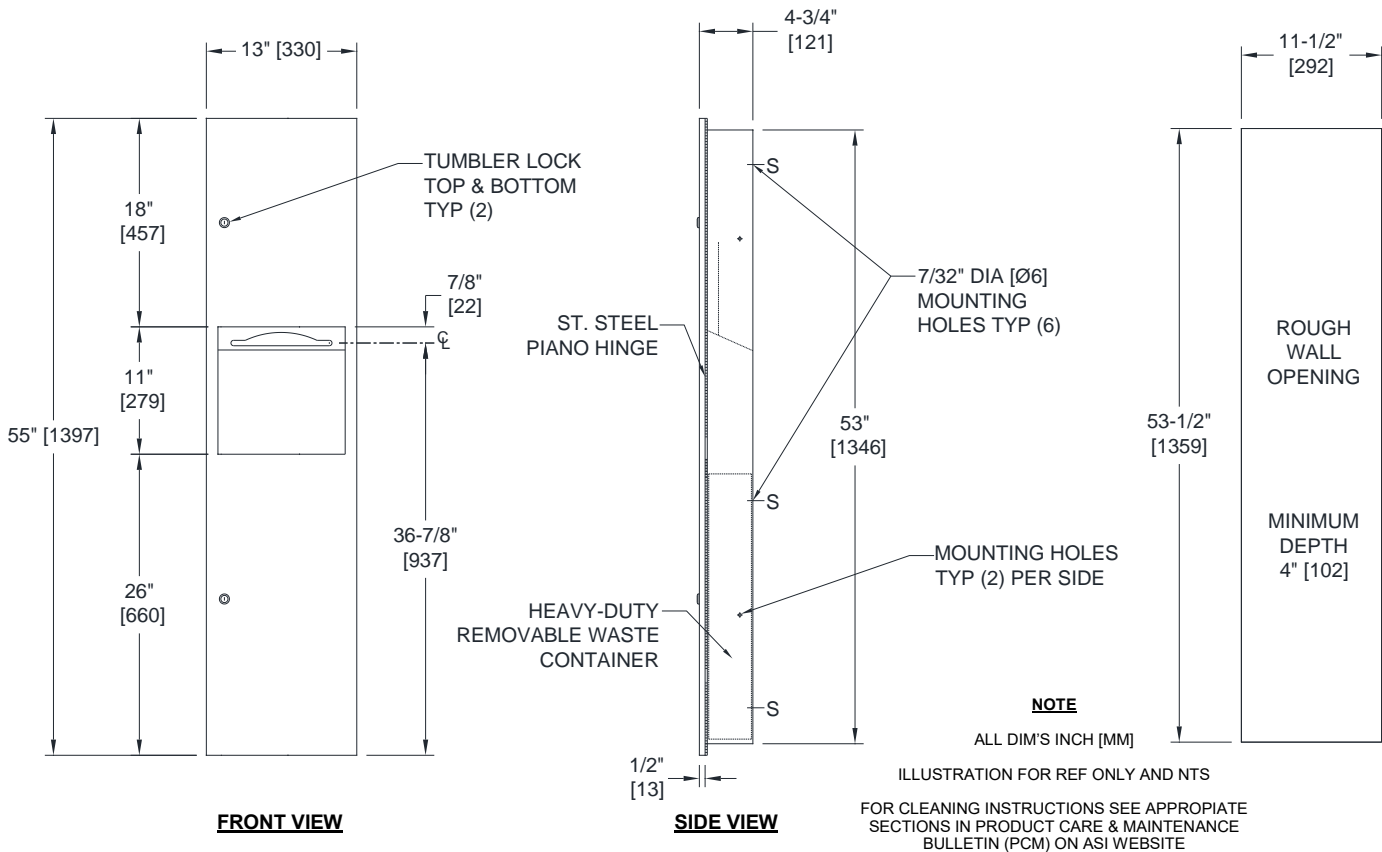

SPECIFICATION

Recessed Towel Dispenser and Waste Receptacle shall hold and dispense 800 standard multi-fold or 600 standard C-fold paper towels, and shall have a waste capacity of 4.24 gal (16L). Cabinet, door, dispenser and waste receptacle shall be fabricated from type 304 stainless steel alloy 18-8. All exposed surfaces shall be satin (or Powder Coated (PC) Matte Black finish if suffix -41 is added to Model №) finish and shall be protected during shipment by PVC film easily removable after installation. Cabinet shall be 20 gage with a 1" [25] wide perimeter trim to lay flush against wall and shall have no exposed fastening devices or visible seams. Full-face door shall be 18 gage, fabricated from one piece with no miters or seams on face and shall have 1/2" [13] square returns to the wall. Door shall be attached to cabinet body with a full length 3/16" Dia [Ø4,8] stainless steel multi-staked piano hinge and shall be held closed with two (2) tumbler locks keyed alike to other ASI washroom equipment. Towel dispensing slot shall have a fully deburred edge for snag free dispensing and user safety. Waste receptacle shall have a rolled edge finger hole for easy servicing.

Recessed Towel Dispenser and Waste Receptacle shall be Model № 6467 (add -41 for PC Matte Black) as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913

INSTALLATION

Mount unit in wall recess with № 10 self-threading flat, oval or pan head screws (by others) through concealed mounting holes provided. Note that top of Rough Wall Opening (RWO) is 3/4" [19] below top of unit. For compliance with 2010 ADA Accessibility Standards and 2015 ABA Standards install unit so that centerline of towel dispenser slot is 48" [1219] Max Above Finished Floor (AFF).

RWO required is 11-1/2" [292] W x 53-1/2" [1359] H X 4" [102] D Min

OPERATION

Paper towels are manually withdrawn through dispensing slot. Unit will continue to feed properly when reloaded with a partial load in place. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Dispenser supply is replenished and waste container is emptied manually on cycles determined by maintenance needs. Locking full-face door over compartments prevents unauthorized access or removal.